


MP88R

Radial Leaded Box

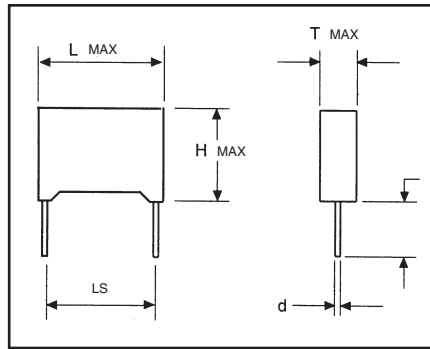

Lead Spacing:

L =	.52/13	.71/18	1.04/26.5	1.26/32
	↓	↓	↓	↓
L.S	.39/10	.6/15	.89/22.5	1.1/27.5
d =	.024/6	.032/8	.032/8	.032/8

Capacitance ranges listed are for standard products. Custom applications are available for all series.

Dimensions (Inches/mm):

μF	160VDC / 100 VAC			250VDC / 160VAC			400VDC / 220VAC			630VDC / 250VAC		
	T	H	L	T	H	L	T	H	L	T	H	L
.01							.20/5	.39/10	.52/13	.24/6	.47/12	.52/13
.012							.20/5	.39/10	.52/13	.24/6	.47/12	.52/13
.015				.20/5	.39/10	.52/13	.24/6	.47/12	.52/13	.20/5	.43/11	.71/18
.018				.20/5	.39/10	.52/13	.24/6	.47/12	.52/13	.20/5	.43/11	.71/18
.022	.18/4	.35/9	.52/13	.24/6	.47/12	.52/13	.24/6	.47/12	.71/18	.24/6	.47/12	.71/18
.027	.18/4	.35/9	.52/13	.24/6	.47/12	.52/13	.20/5	.43/11	.71/18	.24/6	.47/12	.71/18
.033	.20/5	.39/10	.52/13	.24/6	.47/12	.52/13	.20/5	.43/11	.71/18	.30/7.5	.53/13.5	.71/18
.039	.20/5	.39/10	.52/13	.20/5	.43/11	.71/18	.24/6	.47/12	.71/18	.30/7.5	.53/13.5	.71/18
.047	.24/6	.47/12	.52/13	.20/5	.43/11	.71/18	.24/6	.47/12	.71/18	.33/8.5	.59/15	.71/18
.056	.24/6	.47/12	.52/13	.24/6	.47/12	.71/18	.30/7.5	.53/13.5	.71/18	.33/8.5	.59/15	.71/18
.068	.24/6	.47/12	.52/13	.24/6	.47/12	.71/18	.30/7.5	.53/13.5	.71/18	.28/7	.65/16.5	1.04/26.5
.082	.20/5	.43/11	.71/18	.24/6	.53/13.5	.71/18	.33/8.5	.59/15	.71/18	.33/8.5	.67/17	1.04/26.5
.1	.20/5	.43/11	.71/18	.30/7.5	.53/13.5	.71/18	.33/8.5	.59/15	.71/18	.33/8.5	.67/17	1.04/26.5
.12	.24/6	.47/12	.71/18	.30/7.5	.59/15	.71/18	.28/7	.65/16.5	1.04/26.5	.39/10	.75/19	1.04/26.5
.15	.24/6	.47/12	.71/18	.33/8.5	.59/15	.71/18	.28/7	.65/16.5	1.04/26.5	.39/10	.75/19	1.04/26.5
.18	.30/7.5	.53/13.5	.71/18	.33/8.5	.65/16.5	.71/18	.33/8.5	.67/17	1.04/26.5	.52/13	.94/24	1.04/26.5
.22	.30/7.5	.53/13.5	.71/18	.28/7	.65/16.5	1.04/26.5	.33/8.5	.67/17	1.04/26.5	.52/13	.87/22	1.26/32
.27	.33/8.5	.59/15	.71/18	.33/8.5	.67/17	1.04/26.5	.39/10	.75/19	1.04/26.5	.59/15	.98/25	1.26/32
.33	.33/8.5	.59/15	.71/18	.33/8.5	.67/17	1.04/26.5	.52/13	.94/24	1.04/26.5	.59/15	.98/25	1.26/32
.39	.28/7	.65/16.5	1.04/26.5	.39/10	.75/19	1.04/26.5	.52/13	.94/24	1.04/26.5	.71/18	1.18/30	1.26/32
.47	.33/8.5	.67/17	1.04/26.5	.52/13	.94/24	1.04/26.5	.52/13	.87/22	1.26/32	.71/18	1.18/30	1.26/32
.56	.33/8.5	.67/17	1.04/26.5	.52/13	.94/24	1.04/26.5	.59/15	.98/25	1.26/32			
.68	.39/10	.75/19	1.04/26.5	.52/13	.87/22	1.26/32	.59/15	.98/25	1.26/32			
.82	.52/13	.94/24	1.04/26.5	.59/15	.98/25	1.26/32	.71/18	1.18/30	1.26/32			
1.0	.52/13	.94/24	1.04/26.5	.59/15	.98/25	1.26/32	.71/18	1.18/30	1.26/32			
1.2	.52/13	.87/22	1.26/32	.71/18	1.18/30	1.26/32						
1.5	.59/15	.98/25	1.26/32	.71/18	1.18/30	1.26/32						
1.8	.71/18	1.18/30	1.26/32									
2.2	.71/18	1.18/30	1.26/32									

ALTERNATE CASE SIZES AVAILABLE FOR MOST CAPACITANCE VALUES AND VOLTAGES

How to Order - MP88R1003K400 (.1μf / 10% / 400VDC)

Example: MP88R 1003 K 400
 ↓ ↓ ↓ ↓
 Series *Capacitance Tolerance Voltage

Tolerances:

F = 1%, G = 2%, H = 2.5%, J = 5%, K = 10%, M = 20%

*For capacitance values, list three significant digits with fourth digit indicating number of zeros to follow.



2747 Route 20 East, Cazenovia, NY 13035
 phone 315-655-2530 ■ fax 315-655-3862 ■ www.stkelectronics.com

METALLIZED POLYPROPYLENE DOUBLE METAL