


MP96

Axial Leaded Round

Capacitance ranges listed are for standard products. Custom applications are available for all series.

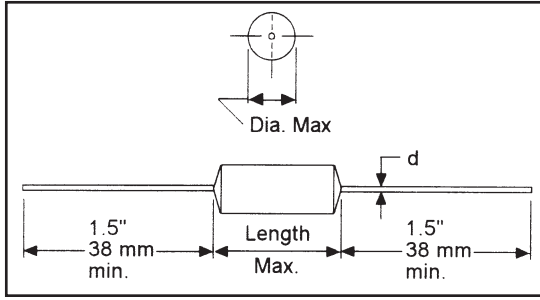

Lead Diameter:

L =	.55/14	.75/19	1.04/26.5	1.26/32	1.77/45	2.28/58
d =	.024/6	.024/6	.032/8	.032/8	.032/8	.04/1

Dimensions (Inches/mm):

µF	250VAC		300VAC		480VAC		600VAC	
	D	L	D	L	D	L	D	L
.01	.20/5	.43/11	.20/5	.55/14	.22/5.5	.75/19	.31/8	.75/19
.012	.20/5	.43/11	.20/5	.55/14	.24/6	.75/19	.33/8.5	.75/19
.015	.20/5	.43/11	.22/5.5	.55/14	.26/6.5	.75/19	.35/9	.75/19
.018	.20/5	.43/11	.22/5.5	.55/14	.28/7	.75/19	.30/7.5	1.04/26.5
.022	.20/5	.43/11	.24/6	.55/14	.30/7.5	.75/19	.31/8	1.04/26.5
.027	.20/5	.55/14	.26/6.5	.55/14	.33/8.5	.75/19	.33/8.5	1.04/26.5
.033	.22/5.5	.55/14	.26/6.5	.55/14	.35/9	.75/19	.37/9.5	1.04/26.5
.039	.24/6	.55/14	.28/7	.55/14	.30/7.5	1.04/26.5	.39/10	1.04/26.5
.047	.26/6.5	.55/14	.30/7.5	.55/14	.31/8	1.04/26.5	.41/10.5	1.04/26.5
.056	.28/7	.55/14	.26/6.5	.75/19	.33/8.5	1.04/26.5	.47/12	1.04/26.5
.068	.30/7.5	.55/14	.30/7.5	.75/19	.35/9	1.04/26.5	.49/12.5	1.04/26.5
.082	.24/6	.75/19	.31/8	.75/19	.37/9.5	1.04/26.5	.47/12	1.26/32
.1	.26/6.5	.75/19	.33/8.5	.75/19	.41/10.5	1.04/26.5	.52/13	1.26/32
.12	.28/7	.75/19	.33/8.5	1.04/26.5	.39/10	1.26/32	.55/14	1.26/32
.15	.30/7.5	.75/19	.35/9	1.04/26.5	.45/11.5	1.26/32	.59/15	1.26/32
.18	.33/8.5	.75/19	.37/9.5	1.04/26.5	.49/12.5	1.26/32	.57/14.5	1.77/45
.22	.35/9	.75/19	.39/10	1.04/26.5	.53/13.5	1.26/32	.63/16	1.77/45
.27	.33/8.5	1.04/26.5	.43/11	1.04/26.5	.57/14.5	1.26/32	.65/16.5	1.77/45
.33	.35/9	1.04/26.5	.47/12	1.04/26.5	.63/16	1.26/32	.71/18	1.77/45
.39	.37/9.5	1.04/26.5	.43/11	1.26/32	.57/14.5	1.77/45	.77/19.5	1.77/45
.47	.39/10	1.04/26.5	.47/12	1.26/32	.61/15.5	1.77/45	.87/22	1.77/45
.56	.43/11	1.04/26.5	.52/13	1.26/32	.65/16.5	1.77/45	.94/24	1.77/45
.68	.47/12	1.04/26.5	.55/14	1.26/32	.69/17.5	1.77/45	1.02/26	1.77/45
.82	.43/11	1.26/32	.59/15	1.26/32	.75/19	1.77/45	1.12/28.5	1.77/45
1.0	.47/12	1.26/32	.63/16	1.26/32	.83/21	1.77/45	1.22/31	1.77/45
1.2	.52/13	1.26/32	.59/15	1.77/45	.89/22.5	1.77/45		
1.5	.57/14.5	1.26/32	.65/16.5	1.77/45	.98/25	1.77/45		
1.8	.61/15.5	1.26/32	.71/18	1.77/45	1.06/27	1.77/45		
2.2	.67/17	1.26/32	.77/19.5	1.77/45	1.18/30	1.77/45		
2.7	.61/15.5	1.77/45	.85/21.5	1.77/45				
3.3	.67/17	1.77/45	.93/23.5	1.77/45				
3.9	.73/18.5	1.77/45	.93/23.5	2.28/58				
4.7	.83/21	1.77/45	.96/24.5	2.28/58				
5.6	.91/23	1.77/45	1.04/26.5	2.28/58				
6.8	.98/25	1.77/45	1.14/29	2.28/58				
8.2	.94/24	2.28/58	1.26/32	2.28/58				
10	1.02/26	2.28/58	1.38/35	2.28/58				
15	1.24/31.5	2.28/58						
22	1.50/38	2.28/58						

ALTERNATE CASE SIZES AVAILABLE FOR MOST CAPACITANCE VALUES AND VOLTAGES

How to Order - MP961003K480 (.1µf / 10% / 480VAC)

Example: MP96 1003 K 480

Series *Capacitance Tolerance Voltage

*For capacitance values, list three significant digits with fourth digit indicating number of zeros to follow.

Tolerances:

F = 1%, G = 2%, H = 2.5%, J = 5%, K = 10%, M = 20%



A division of Pelco Component Technologies

2747 Route 20 East, Cazenovia, NY 13035
phone 315-655-2530 ■ fax 315-655-3862 ■ www.stkelectronics.com

METALLIZED
POLYPROPYLENE
AC RATED